**ComX Computers**
Product Specification Sheet

# 308489


Manhattan Mini DVI 32P to VGA HD15F Cable







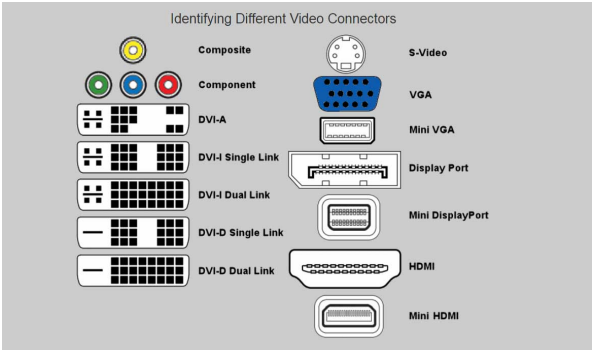


## Specifications

**Overview:**

Easily connects a mini-DVI source with VGA cable. The MANHATTAN Mini-DVI to VGA Adapter establishes a fast and convenient connection between a media source equipped with a mini-DVI port and a VGA display cable. This single cable solution keeps installations and workplaces neat and orderly and requires no external power supplies or complicated configuration making it ideal for presentations, retail displays, trade events, training and more. Gold-plated contacts and full shielding help MANHATTAN Mini-DVI adapters provide clear and stable video transmissions. Durable white PVC jackets and molded boots with strain relief complement Macintosh systems and help ensure connections remain uninterrupted and steady.

**Features:**

- Connects a mini-DVI source to VGA display cable.
- Delivers a single, high-quality signal to a VGA display - ideal for Mac computers.
- Fully shielded to reduce EMI and other interference sources.
- Gold-plated connectors provide maximum connectivity.
- Molded PVC boot and strain relief.

**Specifications:**

© 2013 Respective owners and brand holders. This table has been carefully researched and generated by ComXpert International CC (http://www.comx.co.za), however, errors and omissions may occur. Only references to South Africa apply. All products are sourced in South Africa from the official suppliers and the warranty is that of the local supplier. E&OE. This table and our site's content may be used on condition that this notice and link remains intact and unaltered.

| | |
|---|---|
| **Product Code** | 308489 |
| **Specifications** | |
| **Standards and certifications** | UL |
| | DVI |
| **Contacts** | (1) Mini-DVI-D 32-pin Male |
| | (1) HD 15-pin Female |
| | Gold-plated |
| | Molded PVC boot |
| | Shielded |
| **Cable** | 30 and 32 AWG connectors |
| | Mylar and aluminum shielding |
| | Withstanding voltage: 300 V DC |
| | Insulation resistance: 5 MOhms |
| | Conductive resistance: 10 Ohms |
| | Thermal plastic casing |
| | Length: 20 cm (7.9 in.) |
| | Weight: 31.2 g (1.1 oz.) |

## Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

**Product page: https://www.comx-computers.co.za/308489-Manhattan-Mini-DVI-32P-to-VGA-HD15F-Cable-p-69840.php**

*Images and specifications are provided for reference and are subject to change without notice. E&OE.*

Terms of Use: https://www.comx-computers.co.za/terms-of-use.php
Terms of Sale: https://www.comx-computers.co.za/terms-of-sale.php

PDF generated: 2026-11-07 20:26:29.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.