


36SC225

Lexmark B2442dw Mono Single function Printer

Product Overview

Lexmark B2442dw Mono Single function Printer, 40 ppm, 1200 x 1200 dpi, 512MB, USB, Gigabit Ethernet, Wireless, Duplex, 100-sheet MPF, 250-Sheet Input

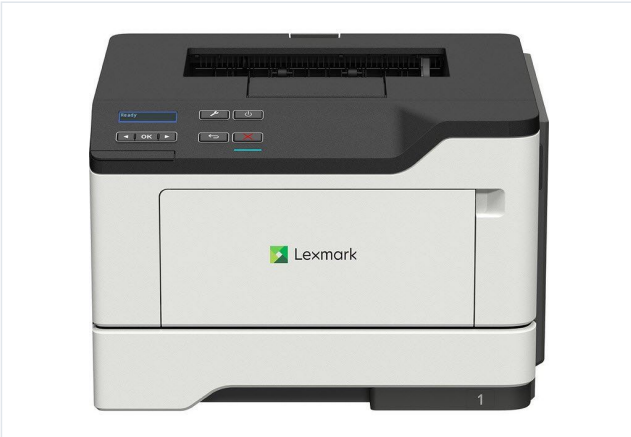

Specifications

Overview:

Strike the perfect balance of performance and affordability in small-workgroup mono printing with the up-to 42 page-per-minute* Lexmark B2442dw, featuring standard two-sided printing, enhanced security and standard Wi-Fi.

Features:

Full-spectrum security

Lexmark's comprehensive approach to product security is a design and engineering mandate across our entire product portfolio. Our security features help keep your information safe-in the document, on the device, over the network, and at all points in between. That's why Keypoint Intelligence-Buyers Lab honoured Lexmark with a prestigious BLI PaceSetter award for Document Imaging Security***. And this Lexmark product enables you to be GDPR ready.

Ready when you are

Robust and reliable, Lexmark printers are built to work anywhere from showroom to warehouse with few interventions. Keep going with long-life components and replacement cartridge yields up to 6,000 pages**.

Performance and value

Get mono printing at up to 42 pages per minute, plus standard two-sided printing, at an affordable price. Durability and long-life components keep your maintenance costs low, too.

Energy efficiency

Make every watt count with energy management features that reduce power consumption whether the printer is active or in sleep mode. Lower fusing temperature and automatic management of processor cores based on workload help meet rigorous ENERGY STAR 2.0 requirements. That benefits the planet and your budget.

Wireless convenience

USB and gigabit Ethernet connections are just the start. Standard Wi-Fi means convenient and secure connectivity while the

ComX Computers

Product Specification Sheet

Lexmark Mobile Assistant app allows fast and easy setup directly from your mobile device.

Versatile media handling

Print what you want, in the size you want. The included media tray adjusts to paper sizes from A6 to legal, while the 100-sheet multipurpose feeder accepts smaller media and envelopes to give you even more design and output possibilities.

Specifications:

© 2019 Respective owners and brand holders. This table has been carefully researched and generated by ComXpert International CC (http://www.comx.co.za), however, errors and omissions may occur. Only references to South Africa apply. All products are sourced in South Africa from the official suppliers and the warranty is that of the local supplier. E&OE. This table and our site's content may be used on condition that this notice and link remains intact and unaltered.	
Specifications	
Product Code	36SC225
General Specs	
Part #	36SC220
Print Technology	Monochrome Laser
Workgroup Size	Small Workgroup
Display	2-line 128 x 32 pixel All Points Addressable (APA) monochrome OLED display
Media Sizes Supported	A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Letter, Statement, Executive, Universal, DL Envelope, Folio, 10 Envelope
Included Paper Handling	100-Sheet Multipurpose Feeder, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input
Standard Ports	Gigabit Ethernet (10/100/1000), 802.11b/g/n Wireless, USB 2.0 Specification Hi-Speed Certified (Type B)
Size (mm - H x W x D)	260 x 399 x 374 mm
Weight	14.0 kg
Packaged Size (mm - H x W x D)	376 x 430 x 470 mm
Packaged Weight, kg	15.81 kg
Printing	
Print Speed	Black: 40 ppm (A4)
	42 ppm
Print Speed Duplex	Up to:
	Black: 20 spm (A4)
	Black: 21 spm (Letter)
Time to First Page	As fast as:
	Black: 6.25 seconds
Print Resolution	Black: 1200 x 1200 dpi, 2400 Image Quality, 300 x 300 dpi, 600 x 600 dpi, 1200 Image Quality
Duplex	2-sided) Printing:
	Integrated Duplex
Printable Area	metric: 4.0 mm of the top, bottom, right and left edges (within)
Paper Handling	

ComX Computers

Product Specification Sheet

Media Types Supported	Paper Labels, Card Stock, Plain Paper, Transparencies, Envelopes, Refer to the Paper & Specialty Media Guide
Finishing Option	No
Number of Paper Inputs	Standard: 2
	Maximum: 3
Paper Input Capacity	Standard: 350 pages 20 lb or 75 gsm bond
	Maximum: 900 pages 20 lb or 75 gsm bond
	350 pages 20 lb or 75 gsm bond
Paper Output Capacity	Up to:
	Standard: 150 pages 20 lb or 75 gsm bond
	Maximum: 150 pages 20 lb or 75 gsm bond
Paper Weight Range Supported	gsm:
	60 - 120 gsm (Standard Tray)
	60 - 216 gsm (Multipurpose Feeder)
Optional Paper Handling	550-Sheet Lockable Tray, 250-Sheet Tray, 550-Sheet Tray
Recommended Monthly Page Volume	1000 - 10000 pages
Maximum Monthly Duty Cycle	Up to:
	100000 pages per month
Cartridges & Imaging	
Laser Cartridge Yields	up to:
	6, 000 -page High Yield Cartridge
	3, 000 -page Cartridge
Imaging Unit Estimated Yield	Up to:
	60000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage
Cartridge(s) Shipping with Product	2, 500 -page Starter Return Program Toner Cartridge
Replacement Cartridges	Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details.
Hardware	
Processor	1.0 GHz MHz
Memory	Standard: 512 MB
	Maximum: 512 MB
Hard Disk	Not Available
Printer Languages	Standard:
	PCL 5e Emulation, PCL 6 Emulation, Microsoft XPS (XML Paper Specification), Personal Printer Data Stream (PPDS), PostScript 3 Emulation, PDF 1.7 emulation, Direct Image
Fonts and Symbol Sets	2 PCL bitmap fonts, OCR-A, OCR-B scalable PCL 5e fonts, For more information, refer to the Technical Reference., 84 scalable PCL fonts, 91 scalable PostScript fonts, 3 of 9 scalable PCL 5e fonts in Narrow, Regular and Wide, 5 PPDS bitmap fonts, 39 scalable PPDS fonts

ComX Computers

Product Specification Sheet

Touch Screen Display	No
Connectivity	
Direct USB	No
Ethernet Network	Yes
Wireless	Yes
Network Protocol Support	TCP/IP IPv6, TCP/IP IPv4, AppleTalk, TCP, UDP
Network Printing Methods	LPR/LPD, Pull Printing, Microsoft Web Services WSD, FTP, TFTP, Enhanced IP (Port 9400), ThinPrint .print integration, IPP 1.0, 1.1, 2.0 (Internet Printing Protocol)
Network Management Protocols	DHCP, APIPA (AutoIP), mDNS, IGMP, WINS, DDNS, SNMPv3, SNMPv1, SNMPv2c, Telnet, NTP, ICMP, HTTP, DNS, ARP, HTTPs (SSL /TLS), Finger
Network Security	IPSec, SNMPv3, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS
Supported Operating Systems	
Microsoft Windows Operating Systems Supported	Windows 10, Windows 8.1, Windows 8, Windows 8 x64, Windows 7 x64, Windows 8.1 x64, Windows 7
Apple Operating Systems Supported	Apple OS X (10.6, 10.7, 10.8, 10.9, 10.10, 10.11, 10.12, 10.13)
Linux Operating Systems Supported	Debian GNU/Linux 7.0, 8.0, Ubuntu 16.04 LTS, Fedora 23, 24, openSUSE Linux 42.3, Red Hat Enterprise Linux WS 6, 7, openSUSE Linux 13.2, SUSE Linux Enterprise Server 10, 11, 12
Citrix MetaFrame	Microsoft Windows 2000 Server running Terminal Services with Citrix MetaFrame XP Presentation Server or Citrix MetaFrame Presentation Server 3.0., Microsoft Windows Server 2012 with Citrix XenApp 6.0, 6.5, Microsoft Windows 2000 Server running Terminal Services with Citrix Presentation Server 3.0, 4.0, Microsoft Windows 2000 Server running Terminal Services with Citrix Presentation Server 4.0
Novell Operating Systems Supported	Novell Open Enterprise Server on SUSE Linux Enterprise Server, Novell NetWare 5.1(SP 6+), 6.0(SP 3+) with Novell Distributed Print Services (NDPS), Novell Open Enterprise Server 2 SP2 on SuSE Linux Enterprise Server 10 SP3 3, Novell NetWare 6.5 Open Enterprise Server, Novell Open Enterprise Server 11 on SUSE Linux Enterprise Server 11, Novell Open Enterprise Server 2 on SUSE Linux Enterprise Server 10 SP4
UNIX Operating Systems Supported	Sun Solaris x86 10, 11, Sun Solaris SPARC 10, 11, IBM AIX 6.1, 7.1
Electrical & Operation	
ENERGY STAR	Yes
ENERGY STAR Typical Electricity Consumption	TEC:
	1.5 kilowatt-hours per week
Noise Level	Operating:
	14 dBA (Idle)
	55 dBA (Print)
Duplex Print Noise Level	Operating:
	54 dBA

ComX Computers

Product Specification Sheet

Average Power	0.1 watts (Hibernate Mode)
	1.9 watts (Sleep Mode)
	7.5 watts (Ready Mode)
	570 watts (Printing)
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity
	Temperature: 16 to 32 degreesC (60 to 90 degreesF)
	Altitude: 0 - 5000 Meters (16,404 Feet)
Product Certifications	ENERGY STAR, ICES-003 Class B, BSMI Class B, VCCI Class B, US FDA, UL 60950-1, FCC Class B, cUL CAN/CSA-C22.2 60950-1, NOM, CB EN/IEC 60950-1, CB EN/IEC 60825-1, CE DoC (EN 62301 Class B, EN 62311, CE EN/IEC 60950-1, CE EN/IEC 60825-1, EN 61000-3, EN 55022 Class B, EuP, EN 55024, UL), EFTA (CE), KCC, CCC, CECP, CEL, C-tick DoC, UL-AR, KC mark, UL GS mark, EC 1275, MET-I, ISO 532B, ECMA-370, TED, GOST-R, SII, TER
ENERGY STAR	Yes
UNSPSC Code	43212105
Harmonized Tariff Code	8443.32.1010
License/Agreement Terms	Printers are sold subject to certain license/agreement conditions.

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page: <https://www.comx-computers.co.za/36SC225-Lexmark-B2442dw-Mono-Single-function-Printer-p-219803.php>

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: <https://www.comx-computers.co.za/terms-of-use.php>

Terms of Sale: <https://www.comx-computers.co.za/terms-of-sale.php>

PDF generated: 2026-10-28 16:42:15.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.