


CA-CCU2-J3

J5create JUCX25L30 type-C to type-C 3m cable

Product Overview

J5create JUCX25L30 Type-C to Type-C 3m cable, with PD + QC up to 100W 20v/5a, Double-braided polyester cover with stretch resistant, Metalized Mylar shielding, Built-In E-marker Chip with Thunderbolt support

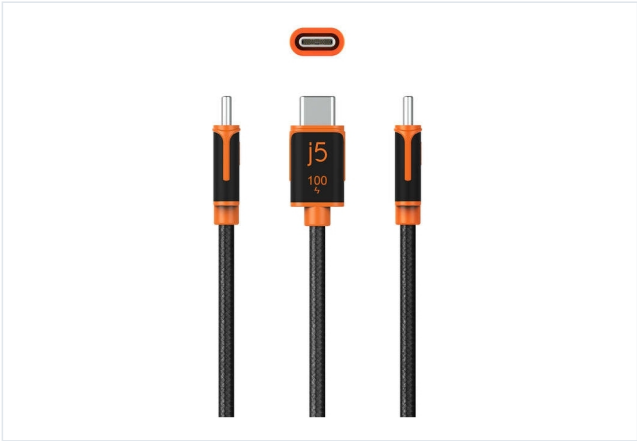

Specifications

Overview:

USB-C 100W Sync & Charge Cable - With a double-braided polyester cover for high durability

The USB-C 100W Sync & Charging Cable is a high-speed cable that is great for charging USB-C devices. It features a reversible USB-C connector on each side. The cable supports Power Delivery and data transfer between smartphones, tablets, and laptops. It supports speeds up to 480 Mbps and an output of 5A. With a double-braided polyester cover, the exterior is abrasion-resistant, reducing fraying and increasing the lifespan.

Features:

- Supports up to 20V/5A 100W charging for all USB-C devices, including phones, tablets, and laptops
- Supports Power Delivery and Qualcomm Quick Charge
- Built-in E-marker chip ensures safe and stable 100W fast charging.
- Delivers transfer speeds up to 480 Mbps
- The USB-C connector is protected by a metal casing and dual-layer molding to prevent damage from bending and twisting
- The double-braided cover adds extra strength and protects the wire
- Braided and metalized Mylar shielding protects the cable from external electromagnetic interference

Specifications:

© 2022 Respective owners and brand holders. This table has been carefully researched and generated by ComXpert International CC (<http://www.comx.co.za>), however, errors and omissions may occur. Only references to South Africa apply. All products are sourced in South Africa from the official suppliers and the warranty is that of the local supplier. E&OE. This table and our site's content may be used on condition that this notice and link remains intact and unaltered.

Specifications	
Product Code	CA-CCU2-J3
Hardware	

ComX Computers

Product Specification Sheet

cable jacket type	PVC
cable shield type	AL+BRAID
connector a	USB-C male connector
connector b	USB-C male connector
Performance	
audio channel	N/A
displays supported	N/A
max current	Max 100W / 5A
max data transfer rate	480 Mbps
max display refresh rate	N/A
max display resolution	N/A
wide screen supported	N/A
Physical Specifications	
cable length	5.9 ft. (180 cm) / 9.8 ft. (300 cm)
color	Black
connector type	Straight
enclosure type	Plastic
operating humidity	< 85% non-condensing
operating temperature	32 to 98 degreesF (0 to 37 degreesC)
product depth	0.24 in. (6 mm)
product height	1.14 in. (29 mm)
product weight	2.65 oz (75g) / 4.59 oz (130g)
product width	0.47 in. (12 mm)
storage humidity	< 85% non-condensing
storage temperature	14 to 140 degreesF (-10 to 65 degreesC)
Package Contents	
Package Contents	1 - USB-C 100W Sync & Charge Cable (JUCX25L30)

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page:

<https://www.comx-computers.co.za/CA-CCU2-J3-J5create-JUCX25L30-type-C-to-type-C-3m-cable-Buy-p-270788.php>

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: <https://www.comx-computers.co.za/terms-of-use.php>

Terms of Sale: <https://www.comx-computers.co.za/terms-of-sale.php>

PDF generated: 2026-10-15 09:15:16.

ComX Computers

Product Specification Sheet

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.