
ComX Computers
Product Specification Sheet

CB-CNV-CLIENT-MICRO

Cambium cnVision Client MICRO 13 dBi CPE

Product Overview

CAMBIUM cnVision Client Micro 13 dBi CPE, 600 Mbps short-range Client, VMS, ONVIF supported, IP55, Wireless connectivity for Video surveillance and CCTV applications, 13 dBi antenna gain

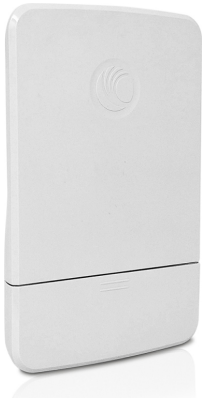

Specifications

Overview:

Cambium Networks introduces cnVision-purpose-built wireless connectivity for video surveillance and CCTV applications. Security system integrators, architects, and consultants now have a hardware and software solution to deliver extremely reliable and secure wireless video systems. cnVision is easy to design, deploy, and manage. cnVision uniquely offers VMS integration and ONVIF client support to auto-detect camera hardware, locally preview video streams, and dramatically simplify troubleshooting and fault isolation in end-to-end CCTV and video surveillance systems.

cnVision Hub FLEXr is compatible with Cambium ePMP 5GHz 90/120 Sector Antenna with Mounting Kit (CB-SEC-5G-90/120), as well as with RF Elements Twist Adapter (RF-TP-EPMP) and RF elements 60 deg Asymmetrical Horn Antenna (RF-AH-TPA60 and others).

Features:

The cnVision portfolio consists of the following hubs and clients:

- cnVision Hub 360: 360-degree coverage for multiple clients and cameras, out to 1.5 km
- cnVision Hub FLEXr: Mate the FLEXr with a horn or sector antenna to cover distances out to 8km
- cnVision Client MAXr: Ruggedization and security in a long-range client, covering the maximum distance
- cnVision Client MINI: Mid-range coverage that can also serve as a hub for point-to-point connections
- cnVision Client MICRO: Short-range coverage to approximately 1.5 km that can also serve as a hub for point-to-point connections

Specifications:

Primary Use	Small form factor client for shorter distances
Alternate Use	Hub for connection to clients that are within a 30 degree Azimuth arc
Antenna Type	Flat Panel
Antenna Gain	13dBi
Antenna Beamwidth Azimuth	3dB - 30 degrees

Elevation	3dB - 28 degrees
Power Consumption	12 Watts
Input voltage	30V DC
Dimensions	13.0 x 20.3 x 5.40 cm
	(5.1 x 8.0 x 2.1 inches)
Weight	0.48 kg (1.05 lbs.)
Environmental	IP55
Temperature	-30 degreesC to +60 degreesC (-22 degreesF to +140 degreesF)
Wind Survival	180 kmph (112 mph)
Certifications	FCCID - Z8H89FT0048, IC - 109W-0048, CE - EN 301 893 V2.1.1 (5.4 GHz), EN 302 502 V2.1.1 (5.8 GHz)

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page:
https://www.comx-computers.co.za/CB-CNV-CLIENT-MICRO-Cambium-cnVision-Client-MICRO-13-dBi-CPE-p-238838.php

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: https://www.comx-computers.co.za/terms-of-use.php
Terms of Sale: https://www.comx-computers.co.za/terms-of-sale.php

PDF generated: 2026-11-15 18:19:52.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.