ComX Computers
Product Specification Sheet

DS-KIS213

Hikvision DS-KIS213 Video Intercom 4 wire HD kit


Product Overview

Hikvision DS-KIS213 Video Intercom 4 wire HD kit, HD TVI Video quality, Door Station, IR Light up to 3m, 1280x720 @60fps Stream Resolution camera, Built-In omnidirectional Microphone, Built-In loudspeaker, 1 Relay, 1 four-wire Interface, Indoor station, 7-inch 1024x600 colorful TFT, Built-In omnidirectional Microphone, 4 physical buttons







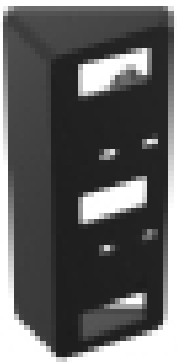

Specifications

Overview:

DS-KIS213 4 wire HD Kits

- HD TVI video quality
- 7-inch LCD screen
- Plug & Play
- Water and dust resistant (IP65)

Specifications:

© 2024 Respective owners and brand holders. This table has been carefully researched and generated by ComXpert International CC (http://www.comx.co.za), however, errors and omissions may occur. Only references to South Africa apply. All products are sourced in South Africa from the official suppliers and the warranty is that of the local supplier. E&OE. This table and our site's content may be used on condition that this notice and link remains intact and unaltered.

Specifications	
Product Code	DS-KIS213
Door station/Video parameters	
Supplement light	IR light, up to 3 m
Resolution	Stream resolution: 1280 x 720@60fps
FOV	Horizontal: 117 degrees, Vertical: 70 degrees, Diagonal: 141 degrees
Door station/Audio parameters	
Audio input	Built-in omnidirectional microphone (<=50 cm)
Audio output	Built-in loudspeaker (30 cm/76 dB, 50 cm/72 dB)
Door station/Device interfaces	
Lock control	1 relay, max 30 V 1 A
Debugging port	1
Four-wire	1 four-wire interface
Door station/General	
Button	1 physical button(s)
Power supply	12 VDC
Power consumption	Max. 4 W
Working temperature	-30 degreesC to 60 degreesC (-22 degreesF to 140 degreesF)
Working humidity	10% to 90%
Dimensions	145 mm x 55 mm x 24 mm (5.71" x 2.17" x 0.94")
Application environment	Outdoor
Installation	Surface mounting
Protective level	IP65, IK08
Material	Metal
Indoor station/Display parameters	
Operation method	Physical button
Type	7-inch colorful TFT
Resolution	1024 x 600
Indoor station/Audio parameters	
Audio input	Built-in omnidirectional microphone (<=50 cm)
Audio output	Built-in loudspeaker (30 cm/76 dB, 50 cm/72 dB)
Indoor station/Capacity parameters	
Linked indoor extensions capacity	2
Linked doorphone capacity	2
Linked analog camera	1
Indoor station/Device interfaces	
Power supply input	12V DC

Debugging port	1
Four-Wire interface	4, 2 for indoor extensions, 2 for doorphones
DIP switch	1 Bit
BNC	1
Indoor station/General	
Button	4 physical buttons
Power supply	12 VDC
Power consumption	<=4 W
Working temperature	-10 degrees C to + 55 degrees C (14 degrees F to 131 degrees F)
Working humidity	10% to 90%
Dimensions (W x H x D)	178 mm x 132 mm x 19 mm (7.01" x 5.20" x 0.75")
Installation	Surface mounting
Application environment	Indoor

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page:
https://www.comx-computers.co.za/DS-KIS213-Hikvision-DS-KIS213-Video-Intercom-4-wire-HD-kit-p-316415.php

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: https://www.comx-computers.co.za/terms-of-use.php
Terms of Sale: https://www.comx-computers.co.za/terms-of-sale.php

PDF generated: 2026-11-16 01:47:45.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.