
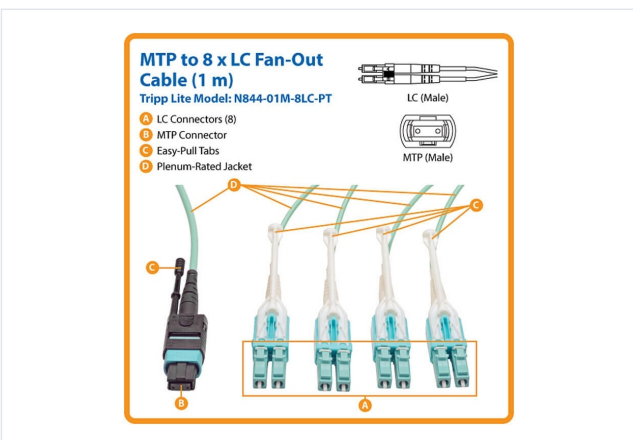
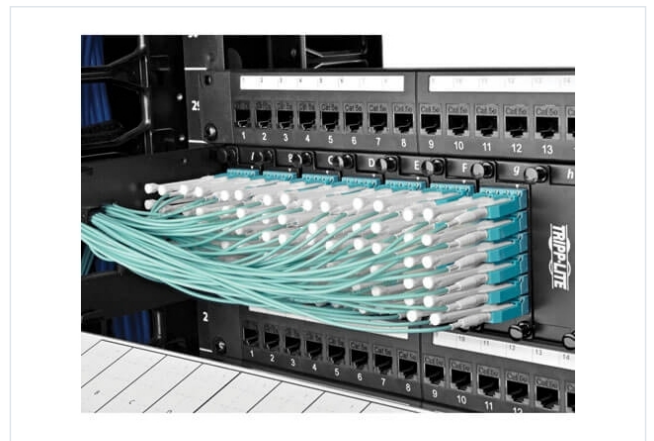
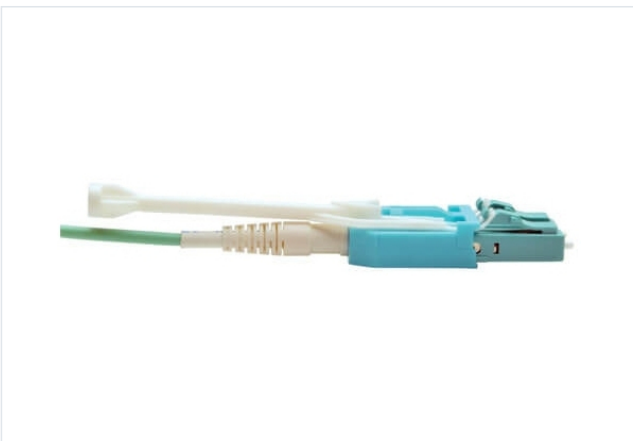


N844-01M-8LC-PT

Eaton Tripp Lite series MTP/MPO Fan-out Cable with Push/Pull Tab Connectors

Product Overview

Eaton Tripp Lite series MTP/MPO Fan-out Cable with Push/Pull Tab Connectors, MTP/MPO to 4xLC, 40GbE, 40GBASE-SR4, OM3 Plenum-rated - Aqua, 1M (3.28 ft.)

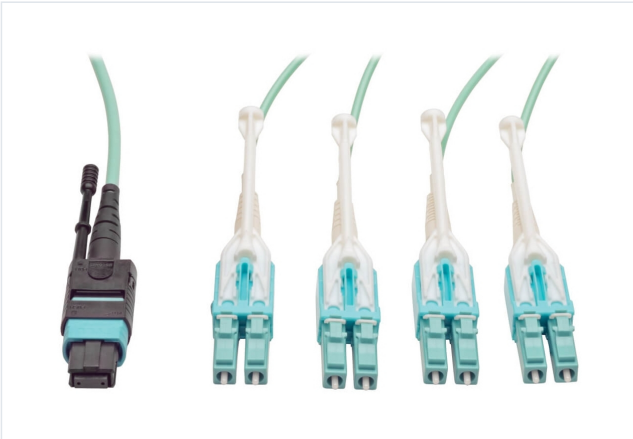

Specifications

Overview:

- MTP / MPO to 8 x LC Fan-out Cable
- Push/Pull tab connectors offer maximum accessibility in high density installations; install / remove with one hand without needing additional tools
- Slim uniboot design saves space and makes cables easier to manage
- Premium-grade ceramic ferrule designed specifically for 10GbE and faster applications
- Sturdy plastic housing for long-lasting durability
- OM3, 40GbE rated, 40GBASE-SR4
- Backward compatible with existing 50/125 fiber
- Plenum rated jacket
- 1M (3.28-ft.) MTP / MPO Fan-out Cable, MTP/MPO to 8 x LC, 40GbE OM3 Plenum

Specifications:

© 2024 Respective owners and brand holders. This table has been carefully researched and generated by ComXpert International CC (http://www.comx.co.za), however, errors and omissions may occur. Only references to South Africa apply. All products are sourced in South Africa from the official suppliers and the warranty is that of the local supplier. E&OE. This table and our site's content may be used on condition that this notice and link remains intact and unaltered.	
Specifications	
Product Code	N844-01M-8LC-PT
OVERVIEW	
UPC Code	37332185259
Technology	Multimode
Optical Mode	OM3
CONNECTIONS	
Side A - Connector 1	12-STRAND MTP/MPO (FEMALE)
Side B - Connector 1	(8) LC DUPLEX (MALE)
Endface Polish	PC
Polarity	Type B (cross)
PHYSICAL	
Cable Jacket Color	Aqua
Connector Color	Aqua , Black , Aqua
Cable Jacket Material	PVC
Cable Jacket Rating	OFNP
Clad Diameter (microns)	125
Core Diameter (microns)	50
Number of Fibers	8
Cable Length (m)	1.01
Minimum Bend Radius	20 mm (Dynamic) , 10 mm (Static)
Shipping Dimensions (hwd / cm)	22.86 x 17.78 x 1.27

ComX Computers

Product Specification Sheet

Shipping Weight (kg)	0.06
Fiber Cable Length	1M (3.3 ft)
ENVIRONMENTAL	
Operating Temperature Range	-4 degrees to 140 degreesF (-20 degrees to 60 degreesC)
Storage Temperature Range	-4 degrees to 140 degreesF (-20 degrees to 60 degreesC)
Operating Humidity Range	5% to 85% RH, Non-Condensing
Storage Humidity Range	35% to 65% RH, Non-Condensing
COMMUNICATIONS	
Network Compatibility	40 Gbps , 100 Gbps , 400 Gbps
Attenuation @ 850NM	3.0 dB/km
Insertion Loss	= 0.35 dB
FEATURES & SPECIFICATIONS	
Push/Pull Tabs	Yes
Breakout	Yes
Trunk	Yes
STANDARDS & COMPLIANCE	
Product Compliance	RoHS , REACH

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page:

<https://www.comx-computers.co.za/N844-01M-8LC-PT-Eaton-Tripp-Lite-series-MTP-MPO-Fan-Buy-p-310208.php>

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: <https://www.comx-computers.co.za/terms-of-use.php>

Terms of Sale: <https://www.comx-computers.co.za/terms-of-sale.php>

PDF generated: 2026-10-19 18:26:21.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.