ComX Computers
Product Specification Sheet


POE-24-12W-GEU

Ubiquiti Gigabit PoE Adapter 24V 12W with Type N cable - White

Product Overview

Ubiquiti Gigabit PoE Adapter 24V 12W with Type N cable - White, POE-24-12w-g-wh, 24VDC @ 0.5A Output voltage, Gigabit LAN Port



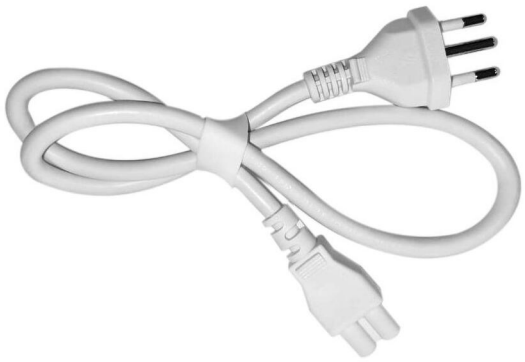

Specifications

Overview:

PoE Injector, 24VDC, 12W, Gbit

SKU: POE-24-12W-G

Ubiquiti PoE Adapters provide a variety of features to help protect your PoE devices:

- Surge protection
- Clamping protection
- Maximum surge discharge
- Peak pulse current
- AC cable with earth ground

Electrostatic discharge (ESD) is the leading cause for outdoor device failures. You can effectively protect against ESD damage using a grounded Ubiquiti PoE Adapter, TOUGHCableTM, and TOUGHCable Connectors.

***Note:**

This product is shipped with a Type N to Clover Power Cable. To convert to a standard 3-Pin connection we recommend using the EUR-TN adapter.

Specifications:

© 2024 Respective owners and brand holders. This table has been carefully researched and generated by ComXpert International CC (http://www.comx.co.za), however, errors and omissions may occur. Only references to South Africa apply. All products are sourced in South Africa from the official suppliers and the warranty is that of the local supplier. E&OE. This table and our site's content may be used on condition that this notice and link remains intact and unaltered.

Specifications	
Product Code	POE-24-12W-GEU
Model	POE-24-12W-G
Dimensions	87 x 44 x 29 mm (3.43 x 1.73 x 1.14")

Weight	99.4 g (3.51 oz)
Output Voltage	24VDC @ 0.5A
LAN Activity Indicator	No
Gigabit LAN Port	Yes
Remote Reset Capability	Yes
Reset Button	Yes
Rated Voltage	100-240VAC @ 50/60Hz
Input Current	0.3A @ 120VAC, 0.2A @ 240VAC
Inrush Current	
Efficiency	75+%
Output Ripple	1% Max.
Switching Frequency	50 kHz
Line Regulation	<= 3%
Load Regulation	<= 5%
2-Pair Powering	Pins 4, 5 (+) and Pins 7, 8 (-)
4-Pair Powering	-
Operating Temperature	0 to 40 degrees C (32 to 104 degrees F)
Storage Temperature	-30 to 70 degreesC (-22 to 158 degrees F)
Operating Humidity	35 to 95% Noncondensing
AC Connector	IEC-320 C6
Data IN / PoE	RJ45 Shielded Socket
Surge Protection	Difference and Common Mode
Clamping Protection	11V Data, 60V Power
Max. Surge Discharge	1500A (8/20 us) Power
Peak Pulse Current	36A (10/1000 us) Data
Shunt Capacitance	
Response Time	
Certifications	CE, FCC, IC, UL

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page:
https://www.comx-computers.co.za/POE-24-12W-GEU-Ubiquiti-Gigabit-PoE-Adapter-24V-12W-with-Type-N-cable-White-p-317369.php

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: https://www.comx-computers.co.za/terms-of-use.php
Terms of Sale: https://www.comx-computers.co.za/terms-of-sale.php

PDF generated: 2026-11-06 04:53:36.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.