


U444-06N-HU-C

Eaton Tripp Lite series USB-C to HDMI Adapter with USB 3.x (5Gbps) Hub Port and PD Charging

Product Overview

Eaton Tripp Lite series USB-C to HDMI Adapter with USB 3.x (5Gbps) Hub Port and PD Charging, HDCP, White, Order on Request

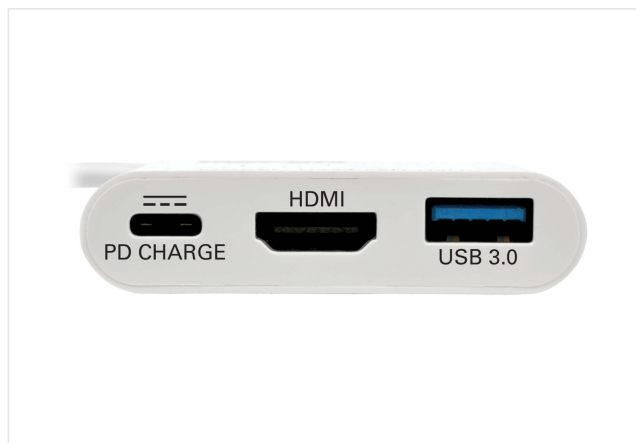

Specifications

Overview:

Adds HDMI, USB-A and USB-C PD ports to the USB-C or Thunderbolt 3 port on your tablet, laptop, notebook, MacBook, Chromebook, smartphone or PC.

- Supports USB DisplayPort Alternate Mode for transmitting audio/video
- Supports HD video resolutions up to 1920 x 1080 (1080p) @ 60 Hz
- PD Charging port supports power input up to 20V 3A
- Reversible USB-C plug connects in either direction
- USB-A port provides up to 5V/1.5A (7.5W) of fast charging power
- Plug-and-play operation with no software or drivers required

Features:

Turn Your Device's USB-C Port into a Multiport Workstation

- Ideal for transmitting audio/video to a large display, adding a USB peripheral, and powering and charging a PD Charging-compliant mobile device simultaneously
- Plug-and-play operation with no software, drivers or external power required
- About the size of a credit card for easy carrying in a pocket, purse or laptop bag

Transmit Crystal-Clear 1080p Video and Digital Audio to HDMI Display

- Compatible with USB-C or Thunderbolt 3 source devices that support USB DisplayPort Alternate Mode
- Supports HD video resolutions up to 1920 x 1080 (1080p) @ 60 Hz
- Extends video from your primary display to another
- Duplicates the same video on 2 displays
- Converts a secondary display to your primary display

Connect a USB Peripheral

- USB-A port accepts flash drives, mice, keyboards, printers and other USB peripherals
- Supports USB 3.2 Gen 1 data transfer rates up to 5 Gbps
- Backward compatible with USB 2.0 and USB 1.1
- Provides up to 5V/1.5A (7.5W) of fast-charging power to mobile devices

Note: Host must support USB OTG (On-the-Go)

Charge a Connected Device

- USB-C PD port connects to wall charger to power and charge the connected PD Charging-compliant USB-C/Thunderbolt 3 device
- Supports power input up to 20V 3A (60W)

Note: USB-C PD port does not support Quick Charge (QC).

Built-In Cable with Reversible USB-C Connector

- Fumble-free reversible USB-C plug connects in either direction for quick connection every time
- Source device with USB-C or Thunderbolt 3 port that supports USB DisplayPort Alternate Mode
- Display device with HDMI input (HDMI port)

Package Includes

- U444-06N-HU-C USB 3.2 Gen 1 USB-C to HDMI Adapter
- Owner's manual

Specifications:

ComX Computers

Product Specification Sheet

© 2024 Respective owners and brand holders. This table has been carefully researched and generated by ComXpert International CC (<http://www.comx.co.za>), however, errors and omissions may occur. Only references to South Africa apply. All products are sourced in South Africa from the official suppliers and the warranty is that of the local supplier. E&OE. This table and our site's content may be used on condition that this notice and link remains intact and unaltered.

Specifications

Product Code	U444-06N-HU-C
--------------	---------------

OVERVIEW

UPC Code	37332193933
----------	-------------

Product Type	Video Adapter
--------------	---------------

Technology	HDMI , USB 3.x
------------	----------------

Host Connector	USB C (MALE)
----------------	--------------

VIDEO

Video Input	USB C (MALE)
-------------	--------------

Video Output	HDMI (FEMALE)
--------------	---------------

Number of Monitors Supported	1
------------------------------	---

Video Ports	HDMI (FEMALE)
-------------	---------------

Video Ports Details	HDMI 1.3 , HDCP 1.3
---------------------	---------------------

Supported Resolutions	1280x720 (720p) , 1920x1080 (1080p)
-----------------------	-------------------------------------

Max Supported Video Resolution	HDMI: 1920 x 1080 (1080p) @ 60Hz
--------------------------------	----------------------------------

Extended Mode	Yes
---------------	-----

Mirror Mode	Yes
-------------	-----

Max Supported Color Depth	30-bit Deep Color
---------------------------	-------------------

HDR Support	No
-------------	----

3D Video Supported	No
--------------------	----

EDID Support	No
--------------	----

DisplayPort Alt Mode	Yes
----------------------	-----

DATA

Data Ports	USB A (FEMALE)
------------	----------------

INPUT

Built-In Cable Length (ft.)	0.36
-----------------------------	------

Built-In Cable Length (in.)	4.33
-----------------------------	------

Bus Powered	Yes
-------------	-----

Product Length (in.)	6
----------------------	---

Product Length (cm.)	15.24
----------------------	-------

Product Length (ft.)	0.5
----------------------	-----

Product Length (m)	0.15
--------------------	------

BATTERY

Battery Charging (5V/1.5A Port)	Yes
---------------------------------	-----

ComX Computers

Product Specification Sheet

POWER	
Power Consumption (Watts)	1.3
USB Power Delivery (PD) Charging Support	Yes
USB Power Delivery (PD) Charging Specification	2
CONNECTIONS	
Number of Ports	3
Side A - Connector 1	USB C (MALE)
Side B - Connector 1	HDMI (FEMALE)
Side B - Connector 2	USB A (FEMALE)
Side B - Connector 3	USB C (FEMALE)
Connector Plating	Nickel
CHARGING	
Number of Charging Ports	2
Total Charging Watts	60
Charging Port Type	USB A (FEMALE) , USB C (FEMALE)
Charging Ports	USB-A: 5V 1.5A (7.5W) , USB-C: 60W (20V 3A) Power Delivery (PD 2.0)
Charging Ports Details	USB-A Port supports fast charging up to 5V/1.5A (7.5W)
	USB-C Port supports PD Charging up to 20V/3A (60W)
Charging Ports / Amps	1.5A , 3A
PHYSICAL	
Color	White
Material of Construction	PVC, ABS
Cable Jacket Color	White
Cable Jacket Material	PVC
Cable Jacket Rating	VW-1
Cable Outer Diameter (OD)	3.9mm
Wire Gauge (AWG)	34 / 28
Shipping Dimensions (hwd / in.)	0.79 x 4.72 x 3.94
Shipping Weight (lbs.)	0.09
Unit Dimensions (hwd / in.)	0.551 x 1.575 x 2.323
Unit Packaging Type	Box
Unit Weight (lbs.)	0.07
ENVIRONMENTAL	
Operating Temperature Range	32 degrees to 113 degreesF (0 degrees to 45 degreesC)
Storage Temperature Range	14 degrees to 158 degreesF (-10 degrees to 70 degreesC)

ComX Computers

Product Specification Sheet

BTUs	4.4 BTU/Hr
Operating Humidity Range	10% to 85% RH, Non-Condensing
Storage Humidity Range	5% to 90% RH, Non-Condensing
Power Provided to Connected Device(s)	USB-A: 5V/1.5A (7.5W) , USB-C: PD Charging 20V/3A (60W)
FEATURES & SPECIFICATIONS	
USB Hub Ports	Yes
Number of USB Hub Ports	1
USB Specification	USB 3.0 (up to 5 Gbps) , USB 3.1 Gen 1 (up to 5 Gbps) , USB 3.2 Gen 1 (up to 5 Gbps)
Multi-Resolution Support	No
Ethernet Support	No
UASP Support	No
Auto MDIX Support	No
Full Duplex Support	No
Suspend Mode Support	Yes
Remote Wakeup Support	Yes
HDCP Specification	1.3
Driver Required	No
STANDARDS & COMPLIANCE	
TAA Compliant Option	N
Product Compliance	CE (Europe) , FCC (USA) , REACH , RoHS , UKCA , WEEE

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page: <https://www.comx-computers.co.za/U444-06N-HU-C-Eaton-Tripp-Lite-series-USB-C-to-HDMI-Buy-p-312838.php>

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: <https://www.comx-computers.co.za/terms-of-use.php>

Terms of Sale: <https://www.comx-computers.co.za/terms-of-sale.php>

PDF generated: 2026-10-11 08:30:27.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.