UDB

Ubiquiti UDB UniFi Device Bridge


Product Overview

Ubiquiti UDB UniFi Device Bridge, 1x GbE RJ45 Port, 1x Passive PoE Output, 802.11a/n/ac WiFi standards, 866.7 Mbps @ 5GHz, 1x internal antenna, 1x RP-SMA connector for external omni-antenna







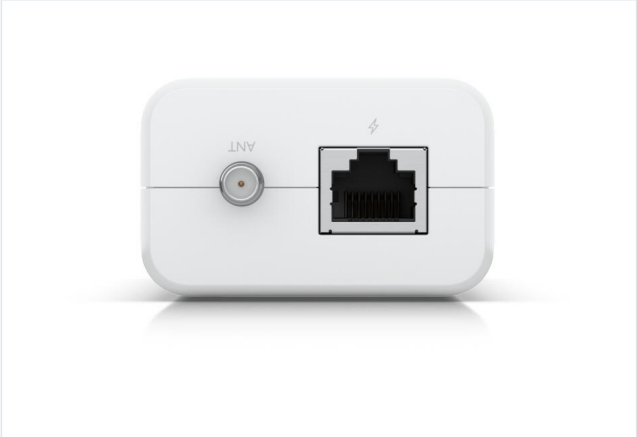



Specifications

Overview:

Device Bridge UDB

- Plug-and-play, wireless bridging PoE adapter with integrated UniFi WiFi Auto-Link.
- (1) GbE LAN port that provides up to 15W of PoE
- 5 GHz band with up to 867 Mbps throughput rate
- Compatible with UniFi Protect PoE cameras, Talk phones, and various IoT devices via an Ethernet connection

Note. UniFi Consoles and APs must have the latest software updates installed.

Specifications:

© 2025 Respective owners and brand holders. This table has been carefully researched and generated by ComXpert International CC (http://www.comx.co.za), however, errors and omissions may occur. Only references to South Africa apply. All products are sourced in South Africa from the official suppliers and the warranty is that of the local supplier. E&OE. This table and our site's content may be used on condition that this notice and link remains intact and unaltered.

Specifications	
Product Code	UDB
Mechanical	
Dimensions	130 x 55 x 34 mm (5.1 x 2.2 x 1.3")
Weight	200 g (7.1 oz)
Enclosure material	Polycarbonate
Mount material	Polycarbonate
Hardware	
Management interface	WiFi
Networking interface	(1) GbE RJ45 port
PoE interface	(1) Passive PoE output
Button	(1) Factory-reset
LED	(4) Blue: signal
	(1) White/blue: indicator
Power method	100-240V AC, 0.45A Max, 50/60 Hz
Max. power consumption	AC input: 25W
	Excluding PoE output: 10W
Max. PoE wattage per port	15W
Supported voltage range	100-240V AC
WiFi standards	802.11a/n/ac
Max. TX power	
2.4 GHz	-
5 GHz	21 dBm
6 GHz	-
MIMO	

2.4 GHz	-
5 GHz	2 x 2
6 GHz	-
Max. data rate	
2.4 GHz	-
5 GHz	866.7 Mbps (BW80)
6 GHz	-
Antenna gain	
2.4 GHz	-
5 GHz	Internal antenna : 5 dBi / External omni antenna : 4 dBi
6 GHz	-
Antenna	(1) Internal antenna
	(1) RP-SMA connector for external omni-antenna
Mounting	Wall (Included)
Ambient operating temperature	-10 to 40 degrees C (14 to 104 degrees F)
Ambient operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC
Supported Data Rates	
802.11a	6, 9, 12, 18, 24, 36, 48, 54 Mbps
802.11n	6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)
802.11ac	6.5 Mbps to 866.7 Gbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80)

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page: https://www.comx-computers.co.za/UDB-Ubiquiti-UDB-UniFi-Device-Bridge-p-317745.php

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: https://www.comx-computers.co.za/terms-of-use.php
Terms of Sale: https://www.comx-computers.co.za/terms-of-sale.php

PDF generated: 2026-11-07 18:33:16.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.