
ComX Computers
Product Specification Sheet

UP-AB1400Ui

APC BX1400Ui Back-ups 1400VA/ 700w UPS

Product Overview

APC BX1400Ui Back-ups - black with AVR+power conditioning , line interactive, 1400VA/ 700w, 6x iEC power outputs - RJ-11 modem/fax + RJ-45 UTP protection; with monitoring software, USB interface

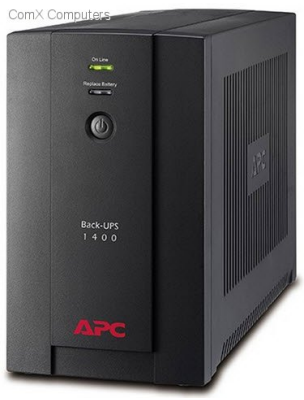

Specifications

Features:

USB connection
Use your PC to access additional power protection and management features for your UPS via a USB Port.

Telephone dataline surge protection
Provides protection of connected equipment from power surges traveling on telephone lines.

Automatic Voltage Regulation (AVR)
Automatically steps up low voltage and steps down high voltage to levels that are suitable for your equipment.

Resettable circuit breaker
Easy recovery from overloads; no need to replace a fuse.

Automatic restart of loads after UPS shutdown
Automatically starts up the connected equipment upon the return of utility power.

Automatic self-test
Periodic battery self-test ensures early detection of a battery that needs to be replaced.

Protection

Battery and surge protected outlets
Back up and protect your hardware and data during power outages, surges and spikes.

Surge only outlets
Protect secondary electronics from surges and spikes without reducing battery power used to run primary electronics during an outage.

Availability

Automatic self-test
Periodic battery self-test ensures early detection of a battery that needs to be replaced.

Battery failure notification
Provides early-warning fault analysis on batteries enabling timely preventive maintenance

Intelligent battery management
Maximizes battery performance, life, and reliability through intelligent, precision charging.

Serviceability

Resettable circuit breaker
Easy recovery from overloads; no need to replace a fuse.

Manageability

Audible alarms
Provides notification of changing utility power and UPS power conditions

LED status display
Quickly understand unit and power status with visual indicators.

Safety

Safety-agency approved
Ensures the product has been tested and approved to work safely with the connected service provider equipment and within the specified environment.

Specifications:

© 2015 Respective owners and brand holders. This table has been carefully researched and generated by ComXpert International CC (http://www.comx.co.za), however, errors and omissions may occur. Only references to South Africa apply. All products are sourced in South Africa from the official suppliers and the warranty is that of the local supplier. E&OE. This table and our site's content may be used on condition that this notice and link remains intact and unaltered.

Specifications	
Product Code	UP-AB1400Ui
Output	
Output Power Capacity	700 Watts / 1400 VA
Max Configurable Power	700 Watts / 1400 VA
Nominal Output Voltage	230V
Output Frequency (sync to mains)	50/60 Hz +/-1 Hz
Topology	Line Interactive
Waveform Type	Stepped approximation to a sinewave
Output Connections	(6) IEC 320 C13 (Battery Backup)
Input	
Nominal Input Voltage	230V

Input Frequency	50/60 Hz +/- 3 Hz (auto sensing)
Input Connections	IEC-320 C14
Cord Length	1.22 meters
Input voltage range for main operations	150 - 280V
Maximum Input Current	6A
Input Breaker Capacity	10 A
Type of Input Protection Required	3-pole breaker
Batteries & Runtime	
Battery Type	Maintenance-free sealed Lead-Acid battery with suspended electrolyte : leakproof
Typical recharge time	8 hour(s)
Communications & Management	
Interface Port(s)	USB
Control panel	LED status display with On Line : On Battery : Replace Battery and Overload indicators
Audible Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm
Surge Protection and Filtering	
Surge energy rating	273 Joules
Data Line Protection	RJ-11 Modem/Fax protection
Physical	
Maximum Height	215.00 mm
Maximum Width	130.00 mm
Maximum Depth	336.00 mm
Net Weight	12.00 KG
Shipping Weight	12.94 KG
Shipping Height	295.00 mm
Shipping Width	245.00 mm
Shipping Depth	440.00 mm
Color	Black
Environmental	
Operating Environment	0 - 40 degreesC
Operating Relative Humidity	0 - 95% no%
Operating Elevation	0-3000 meters
Storage Temperature	-15 - 40 degreesC
Storage Relative Humidity	0 - 95% no%
Storage Elevation	0-9000 meters
Audible noise at 1 meter from surface of unit	45.00 dBA

Conformance	
Regulatory Approvals	A-tick, C-tick, CE, IEC 62040-1-1, TelePermit

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page: https://www.comx-computers.co.za/UP-AB1400Ui-APC-BX1400Ui-Back-ups-1400VA-700w-UPS-p-118915.php

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: https://www.comx-computers.co.za/terms-of-use.php
Terms of Sale: https://www.comx-computers.co.za/terms-of-sale.php

PDF generated: 2026-11-15 00:22:02.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.