



## General Description

This box is used as a termination point for the feeder cable to connect with drop cable in FTTx communication network system. It integrates fiber splicing, splitting, distribution, storage and cable connection in one unit. Meanwhile, it provides solid protection and management for the FTTx network building.

## Features

- Total enclosed structure, be in nice shape
- Protects and manages cable effectively
- Secured with anti-theft locking mechanism
- Standard size, light weight
- High quality PC +ABS material
- Good properties of dust, and moisture proofing, IP65
- Suitable for SC and LC duplex adaptor and pigtail
- Easy to operate
- Suitable for both outdoor and indoor use
- Clamping for feeder cable and drop cable, fiber splicing, fixation, storage, distribution...etc all in one

## Application


- Telecommunication subscriber loop
- LAN/WAN
- Fiber to the home (FTTH)

## Dimension

186×116×41mm

## Installation Dimensions

196mm

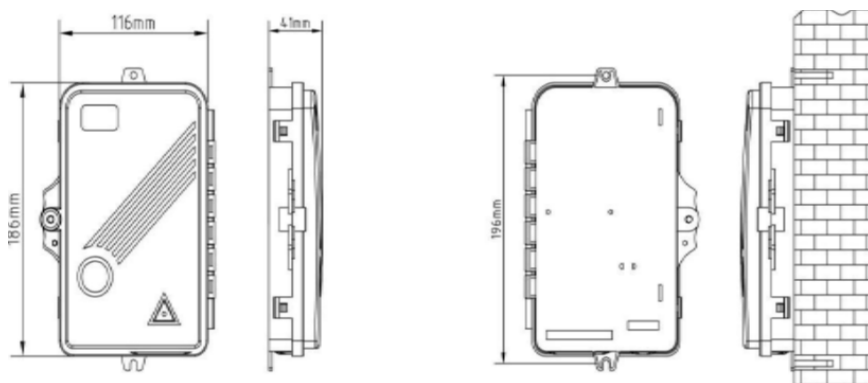

| Item                     | Parameter                                                                                                                                     |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Model No.                | AC-FIB-DIST-4                                                                                                                                 |
| Mounting way             | Wall-mounting,                                                                                                                                |
| Work Temperature         | -40 °C ~ +85 °C                                                                                                                               |
| Relative Humidity        | ≤ 85% (+30 °C)                                                                                                                                |
| Atmospheric Pressure     | 70Kpa~106Kpa                                                                                                                                  |
| Insert Loss              | ≤ 0.2dB                                                                                                                                       |
| UPC Return Loss          | ≥ 50dB                                                                                                                                        |
| APC Return Loss          | ≥ 60dB                                                                                                                                        |
| Insert and Pull-out Life | ≥ 1000 times                                                                                                                                  |
| Insulation               | The grounding device is insulated with the Termination box, IR ≥1000m Ω/500V (Direct current )                                                |
| Withstand Voltage        | Between the grounding device and the box body, the withstand voltage is over 3000V/Min, no breakdown and flashover. U ≥3000V (direct current) |