English

SRP-350V

3-inch Thermal POS Printer

Retail | Restaurants & Bars | Quick Service Restaurant | Coffee

Reliable Steady Seller

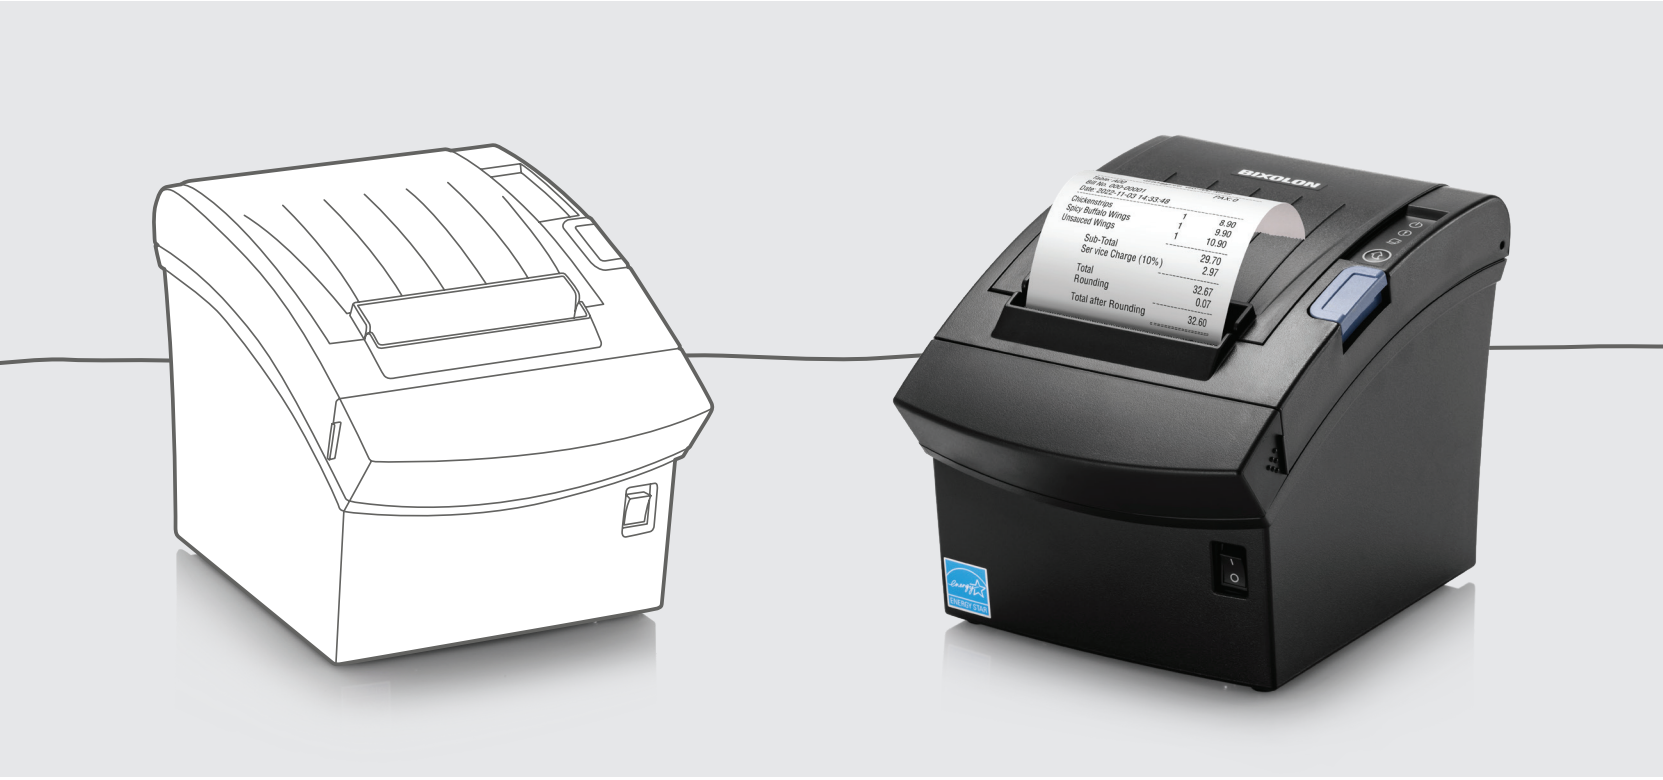

Powerful Printing Performance

- Fast printing speeds up to 300 mm/sec
- Paper saving mode, reducing the length of a receipt up to 25%
- Part of the world-class SRP-350 line
- Energy Star certfied

User Convenience

- Supporting a Visibility Intelligence ™ function for optimal print quality on Blue4est® paper
- Anti-jam guide
- 180 or 203 dpi options
- Optional B-melodist

Multiple Interface Choices

- Built-in USB
- Optional Serial, Parallel or Ethernet

BIXOLON
a Better Solution for your Business™

SRP-350V

3-inch Thermal POS Printer

Specifications

Print Characteristics

Print Method
Direct Thermal

Print Speed
SRP-350V: Up to 300 mm/sec
SRP-352V: Up to 270 mm/sec

Print Resolution
SRP-350V: 180 dpi
SRP-352V: 203 dpi

Print Width
Up to 72 mm

Sensor
Paper End, Paper Near End, Cover Open,
Visibility Intelligence Sensor

Media Characteristics

Media Type
Receipt

Media Width
80 mm
Optional 58 mm

Media Roll Diameter
Up to 83 mm

Media Thickness
0.05 ~ 0.08 mm

Supply Method
Easy Paper Loading

Physical Characteristics

Dimensions (W x D x H)
145 x 204 x 146 mm
(5.70 x 8.03 x 5.74 inch)

Weight
1.6 kg (3.52 lbs.)

Electrical
EnergyStar Certified,
External Power Adaptor 100-240 V AV, 50/60 Hz

Drawer Port
2 ports (Via y-type adaptor)

Performance Characteristics

Memory
64 Mb SDRAM, 64 Mb Flash

NV Image Memory
256 Kbytes (Mono)

Receive Buffer
4 Kbytes

User Define Buffer
12 Kbytes

Interface
Standard: USB V2.0 FS
Optional: ① USB V2.0 FS + Serial
② USB V2.0 FS + Parallel
③ USB V2.0 FS + Ethernet
④ USB V2.0 FS + Dual Serial

Environment Characteristics

Temperature
Operating: 0 ~ 40 °C (32 ~ 104 °F)
Storage: -20 ~ 60 °C (-4 ~ 140 °F)

Humidity
Operating: 10 ~ 80 % RH
Storage: 10 ~ 90 % RH

Software

Emulation
BXL / POS

Driver / Utility
Windows Driver
OPOS/JPOS Driver
Linux/Mac CUPS Driver
Virtual COM USB/Ethernet Driver
Utility Program
Network Auto Installer

SDK / Plugin
Android/iOS/Windows SDK
Linux SDK
Xamarin SDK
Web Print SDK
Cordova Plugin

Application
mPrint App (Android, iOS)

Fonts / Graphics / Symbologies

Character Size
Font A: 12 x 24, Font B: 9 x 17, Font C: 9 x 24,
KOR, CHN, JPN: 24 x 24

Characters Per Line
SRP-350V: Font A: 42, Font B, C: 56,
KOR, CHN, JPN: 21
SRP-352V: Font A: 48, Font B, C: 64,
KOR, CHN, JPN: 24

Character Sets
Alphanumeric: 95
Extended Graphics: 128 x 35 page
International: 32

Graphics
Supporting user-defined fonts, graphics,
formats, and logos

Barcode Symbologies
1D: Coda Bar, Code39, Code93, Code128, EAN-8,
EAN-13, ITF, UPC-A, UPC-E
2D: Data Matrix, PDF417, QR Code

Accessories

Standard
USB A-B Cable 1.8 m

Optional
Built-in SMPS, Vertical stand, Wall mount,
Splash Proof Cover, External buzzer, B-Melodist,
Serial Cable (9-9/25-9 pin), Parallel Cable

BR_SRP-350V_EN_MAY23_V1

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

BIXOLON
www.BIXOLON.com

BIXOLON Co.,Ltd.
+82 31 218 5500
sales@bixolon.com

BIXOLON America Inc.
+1 858 764 4580
sales@bixolonusa.com

BIXOLON Mexico
+521 55 8852 7880
marcelo@bixolonusa.com

BIXOLON Europe GmbH
+49 211 68 78 54 0
sales@bixolon.de

BIXOLON MEA
+971 4 222 6480
russell@bixolon.com