Why come to us for a solution?

Quality products

Wide range of products

Nationwide backup

Locally produced UPS's

Competitively priced

Unique design

Good value for money

Preventative maintenance contracts



LI SERIES

LINE-INTERACTIVE UPS 600VA - 3000VA

The LI Series provides reliable power protection and also provides clean power for your electronic equipment.
The Buck & Boost AVR function corrects either under voltage or over voltage conditions without unnecessary battery drainage and extends the life of the battery. With a built-in powerful charger, the UPS can be fully charged back to 90% within 6-10 hours. The battery may be charged continuously even though it is in the OFF mode.




APPLICATION

PC's, Workstations, Terminals, SOHO, Servers, Industry Equipment, Modems, desktop printers, PABX's, etc.

FEATURES

- Microprocessor Controlled
- LED Display
- Built-in buck & boost AVR
- Powerful DC charger - 90% within 6-10 hours
- Battery recharge in "off" mode
- Cold start
- Wide input voltage range
- Self-testing on UPS start-up
- Smart Communication port
- Intelligent Monitoring Software

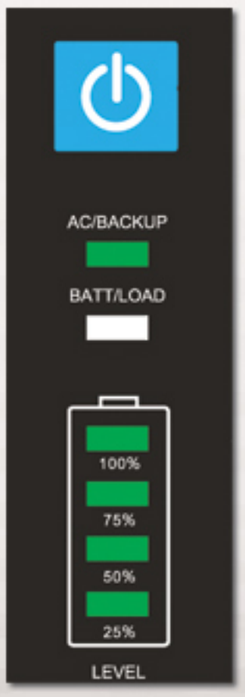

www.pss.co.za

LI SERIES

LINE-INTERACTIVE UPS 600VA - 3000VA

MODEL	LI060	LI120	LI200	LI300
CAPACITY	600VA	1200VA	2000VA	3000VA
INPUT				
PHASE	single phase			
VOLTAGE RANGE	230V ±20%			
FREQUENCY	50Hz			
OUTPUT				
VOLTAGE	230V ±10%			
WAVEFORM	AC mode: sine wave; battery mode: modified sine wave			
FREQUENCY	50Hz			
TRANSFER TIME	typical 2-6ms			
PROTECTION				
SURGE PROTECTION	metal oxide varistor			
SHORT CIRCUIT	fuse			
COMMUNICATION				
	USB			
BATTERY				
TYPE	sealed lead acid, maintenance free			
RECHARGE	after full discharge, 6-8 hours to 90% capacity			
BACKUP TIME	10-15min load dependent			
CHARGE CURRENT	350mA ~ 1A			
BATTERY CONFIGURATION	1x 12V/7AH	2x 12V/7AH	2x 12V/9AH	4x 12V/9AH
INDICATION				
AC MODE	green LED on			
BATTERY MODE	green LED flashes every 8 seconds			
OTHER				
AUDIBLE NOISE AT 1M	<40 dB			
TEMPERATURE	0~40°C			
HUMIDITY	95% (non-condensing)			
NET/GROSS WEIGHT	4.4 / 5 kg	7.8 / 8.6 kg	10.5 / 12.5 kg	23 / 24.1 kg
UNIT DIMENSIONS (W-D-H) mm	88 x 275 x 140	121 x 326 x 185		150 x 395 x 200
PACKAGE DIMENSIONS (W-D-H)	140 x 324 x 205	195 x 403 x 280		212 x 510 x 308

Notes:

In the interests of continuous product improvement, all specifications are subject to change without notice.