



RECOMMENDED
PANEL CUT OUT

RoHS




IP66~68




PIN ASSIGNMENT
FRONT VIEW
(前視圖)



REAR VIEW
(後視圖)

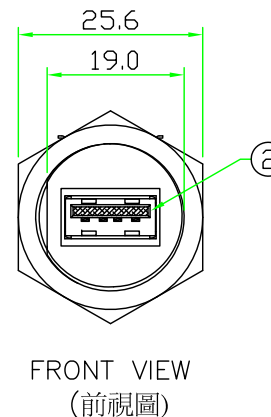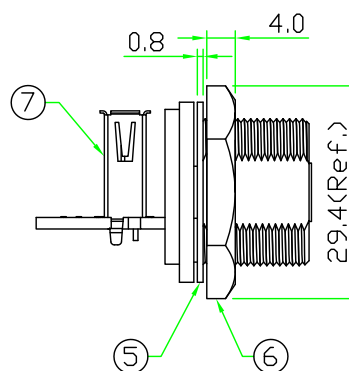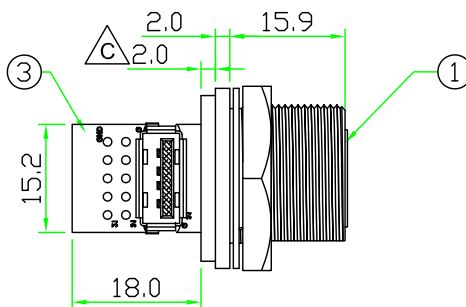

FRONT VIEW
(前視圖)

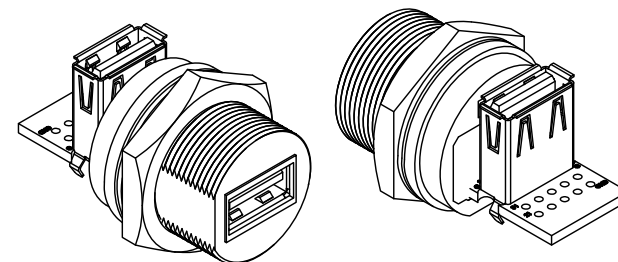

NOTES:

1. Current Rating: 1A
2. Connector Temperature Range: -25°C to 85°C
3. Contact Resistance: $\leq 30m\Omega$
4. Insulation Resistance: $\geq 100M\Omega$
5. Breakdown Voltage: $\geq AC 500V/1$ Minute
6. Panel Thickness Max. 6.0 mm

OLD P/N:USB2AC-P3CSJ
(原型號)

7	CONNECTOR	USB 2.0 A Type Female Straight PCB Type.		1	
6	HEX NUT	NYLON+GF.	BLACK	1	
5	GASKET	EPDM.	BLACK	1	
4	GLUE	EPOXY.	BLACK	1	
3	PCB	FR4. Double Size, 1.6mm Thickness		1	
2	CONNECTOR	USB 2.0 A Type Female Connector.	WHITE	1	
1	BODY	USB A Type Female Connector Body. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : USB 2.0 A Type Female C Size Screw Type Circular Flange Panel With Straight USB 2.0 A Type Female		
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°			P/N: USB2AC-P3CRJ		DR. Patty
					CH. ERIC
REV. C		SHEET 1/1	DWG.NO: USB2AC-P3CRJ		AP.