ComX Computers
Product Specification Sheet

TL-POE160S


TP-Link PoE Plus injector Adapter


Product Overview

TP-Link TL-POE160S PoE Plus injector Adapter, Supplies up to 30 W, 1x Gigabit RJ45 data-in Port, 1x Gigabit RJ45 power+data-out Port, 1 AC Power Port





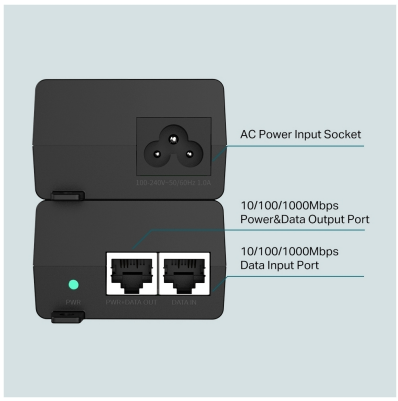

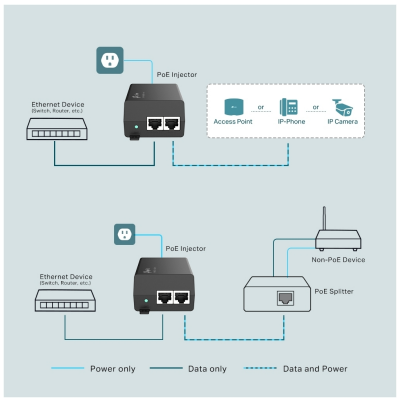



Specifications

Overview:

TL-POE160S

PoE+ Injector

- 2 Gigabit ports ensure faster transmission
- Complies with IEEE802.3af/at standards, supplies up to 30 W
- Reduces infrastructure costs by transmitting data and power simultaneously via an Ethernet cable
- Automatically determines and supplies the exact power to meet the device's need
- Wall-mounting and desktop design accommodates most installation scenarios
- Plug & Play installation, requires no configuration
- Integrated power supply

Features:

What This Product Does

The PoE+ Injector TL-POE160S fully complies with IEEE 802.3af/at standards, and can work with all IEEE 802.3af/at PoE compliant PDs (Powered Devices) or PoE Receiver Adapters, such as TP-Link's TL-POE10R, or other equivalent product, to expand your network to where there are no power line or outlet, where you wish to fix device such as AP, IP Camera or IP Phone, etc.

Specifications:

© 2024 Respective owners and brand holders. This table has been carefully researched and generated by ComXpert International CC (http://www.comx.co.za), however, errors and omissions may occur. Only references to South Africa apply. All products are sourced in South Africa from the official suppliers and the warranty is that of the local supplier. E&OE. This table and our site's content may be used on condition that this notice and link remains intact and unaltered.

Specifications	
Product Code	TL-POE160S
NETWORK	
Standards and Protocols	IEEE802.3i, IEEE802.3u, IEEE802.3ab, IEEE802.3af, IEEE802.3at
GENERAL	
Certification	FCC, CE, RoHS
Environment	Operating Temperature: 0 degreesC to 40 degreesC (32 degreesF to 104 degreesF)
	Storage Temperature: -40 degreesC to 70 degreesC (-40 degreesF to 158 degreesF)
	Operating Humidity: 10% to 90%RH non-condensing
	Storage Humidity: 5% to 90%RH non-condensing
PACKAGE CONTENTS	
Package Contents	PoE+ Injector TL-POE160S
	Installation Guide
	Power Cord
	RJ45 Cable
	Wall Mounting Kits
HARDWARE FEATURES	

Network Media	10BASE-T: UTP category 3, 4, 5 cable (maximum 100 m)
	EIA/TIA-568 100ohm STP (maximum 100 m)
	100BASE-TX: UTP category 5, 5e cable (maximum 100 m)
	EIA/TIA-568 100ohm STP (maximum 100 m)
	1000BASE-T: UTP category 5, 5e, 6 cable(maximum 100 m)
Ports	1 10/100/1000Mbps RJ45 data-in port
	1 10/100/1000Mbps RJ45 power+data-out port
	1 AC power port
Power Consumption	Input: 100-240 V, 50/60 Hz
	Output: Auto-determine the necessary power requirements (max. 30 W)
Basic Function	Auto-Sensing Algorithm enables providing power with 802.3af/at PD
	Auto-determine the necessary power requirements
	Wall-mounting and desktop installation supported
	Plug-and-Play
LED Indicator	ON: Supplying power normally
	OFF: No power supply
Dimensions (W x D x H)	4.9 x 2.3 x 1.4 in
	(125 x 59 x 37 mm)

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page: https://www.comx-computers.co.za/TL-POE160S-TP-Link-PoE-Plus-injector-Adapter-p-301787.php

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: https://www.comx-computers.co.za/terms-of-use.php
Terms of Sale: https://www.comx-computers.co.za/terms-of-sale.php

PDF generated: 2026-11-07 22:02:06.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.