
ComX Computers
Product Specification Sheet

BT-CiPFW

Choiix C-A006-K1 i-PowerFort

Product Overview

Choiix C-A006-W1 i-PowerFort - White - battery for iPhone or iPad, cable free direct attach, 70x60x16mm compact size, 5.5Whrs / 1450mAh - with battery life indicator, with OVP, ODP, OTP, SCP, 71g

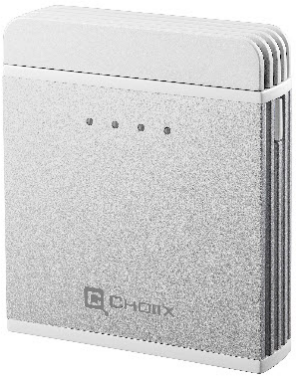

Specifications

Features:

- Compatible with iPhone and iPod series
- Premium enclosure
- Convenient battery life indicator lights
- Safe and easy portability with the included storage bag
- Cap design prevents dust accumulation

World-class protections:

- Over charge protection
- Over discharge protection
- Over temperature protection
- Short circuit protection

Package content:

- iPower Fort Backup Battery
- Carry bag
- Micro USB

Specifications:

Battery capacity	1450 mAh
Input	DC 5V/1A
Output	DC 5V/1A
Battery type	Lithium-polymer
Recharging time	2-3 hours

Dimensions	7 x 6 x 1.6 cm (2.7 x 2.4 x 0.6 inch)
Weight	71g (2.5 Oz)

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page: https://www.comx-computers.co.za/BT-CiPFW-Choiix-C-A006-K1-i-PowerFort-p-52043.php

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: https://www.comx-computers.co.za/terms-of-use.php
Terms of Sale: https://www.comx-computers.co.za/terms-of-sale.php

PDF generated: 2026-11-01 09:45:06.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.