ComX Computers
Product Specification Sheet


LE1200I

Line-R 1200VA Automatic Voltage Regulator

Product Overview

Line-R 1200VA Automatic Voltage Regulator



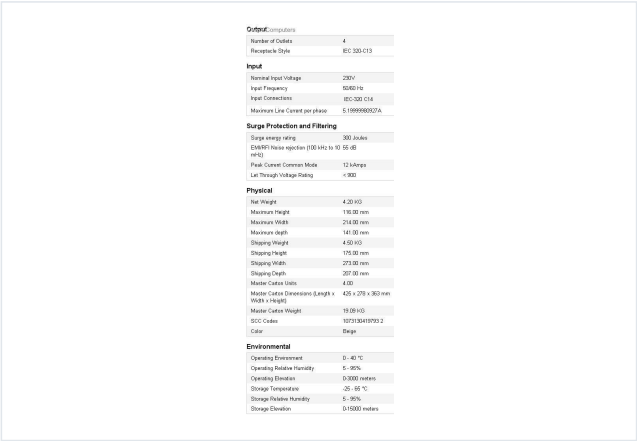

Output Computers	
Number of Outlets	4
Receptacle Style	IEC 320-C13
Input	
Nominal Input Voltage	230V
Input Frequency	50/60 Hz
Input Connections	IEC-320 C14
Maximum Line Current per phase	5.1999998927A
Surge Protection and Filtering	
Surge energy rating	300 Joules
EMI/RFI Noise rejection (100 kHz to 10 mHz)	55 dB
Peak Current Common Mode	12 kAmps
Let Through Voltage Rating	< 900
Physical	
Net Weight	4.20 KG
Maximum Height	116.00 mm
Maximum Width	214.00 mm
Maximum depth	141.00 mm
Shipping Weight	4.50 KG
Shipping Height	175.00 mm
Shipping Width	273.00 mm
Shipping Depth	207.00 mm
Master Cartos Units	4.00
Master Carton Dimensions (Length x Width x Height)	425 x 278 x 363 mm
Master Carton Weight	19.09 KG
SCC Codes	10713041819703 2
Color	Beige
Environmental	
Operating Environment	0 - 40 °C
Operating Relative Humidity	5 - 95%
Operating Elevation	0-3000 meters
Storage Temperature	-25 - 65 °C
Storage Relative Humidity	5 - 95%
Storage Elevation	0-15000 meters

Specifications

The Line-R is designed for use with voltage sensitive equipment such as a: computer, monitor,inkjet printer, scanner or fax. It is also designed for use with home electronics (TVs, stereos,CD players, etc.).

Appliances not suitable for use with the Line-R are items such as refrigerators, freezers, powertools, air conditioners, dehumidifiers, blenders, or any device that employs an AC motor foroperation.

Not for use with life sustaining equipment and any device with a power requirementexceeding the "Maximum Output Power Capacity" rating listed in the Specifications table.

Features:

Automatic Voltage Regulation (AVR)
Automatically steps up low voltage and steps down high voltage to levels that are suitable for your equipment.

Lightning and Surge Protection
To prevent damage to your equipment from power surges and spikes.

Resettable circuit breaker
Easy recovery from overloads; no need to replace a fuse.

Status Indicator LED's
Provides a quick visual indication of your unit's status.

Transformer Block Spacing
Connect bulky transformer block plugs without covering up other outlets.

Specifications:

Output

Number of Outlets	4
Receptacle Style	IEC 320-C13
Input	
Nominal Input Voltage	230V
Input Frequency	50/60 Hz
Input Connections	IEC-320 C14
Maximum Line Current per phase	5.2A
Surge Protection and Filtering	
Surge energy rating	300 Joules
EMI/RFI Noise rejection (100 kHz to 10 MHz)	55 dB
Peak Current Common Mode	12 kAmps
Let Through Voltage Rating	< 900
Physical	
Net Weight	4.20 KG
Maximum Height	116.00 mm
Maximum Width	214.00 mm
Maximum Depth	141.00 mm
Shipping Weight	4.50 KG
Shipping Height	175.00 mm
Shipping Width	273.00 mm
Shipping Depth	207.00 mm
Master Carton Units	4
Master Carton Dimensions (Length x Width x Height)	425 x 278 x 363 mm
Master Carton Weight	19.09 KG
SCC Codes	1073130419793 2
Color	Beige
Environmental	
Operating Environment	0 - 40 degreesC
Operating Relative Humidity	5 - 95%
Operating Elevation	0-3000 meters
Storage Temperature	-25 - 65 degreesC
Storage Relative Humidity	5 - 95%
Storage Elevation	0-15000 meters
Conformance	
Regulatory Approvals	C-tick, CE, EN 55024, EN 60950, GOST, GS Mark

Environmental Compliance	RoHS, China RoHS

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page: https://www.comx-computers.co.za/computer-store-specifications.php?products=17145

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: https://www.comx-computers.co.za/terms-of-use.php
Terms of Sale: https://www.comx-computers.co.za/terms-of-sale.php

PDF generated: 2026-11-04 22:56:34.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.