


LT-BG9/30WP

Bitfenix BFA-AAL-30GK9-RP alchemy aqua Led strips - 9 leds / 30cm Green

Product Overview

Bitfenix BFA-AAL-30GK9-RP alchemy aqua Led strips - with WaterProof rubber protection + TriBright LED with independent ICs for each LED bulb , support daisy-chain connect for mutiple led strips - Green , 9 leds / 30cm

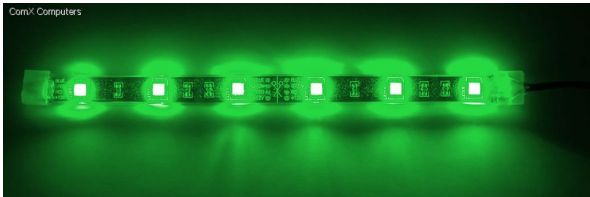

Specifications

Overview:

Part of the bitfenix alchemy premium modding series, alchemy led strips are the ideal choice when modding inspiration strikes. These precision manufactured led strips come with bitfenix tribright led technology for the absolute brightest led strips available. Alchemy led strips come in both chainable connect and waterproof aqua, and offer a multitude of lengths and colors, enabling you to bring your modding vision to light.

Led strips

Tribright led technology

When only the brightest will do, bitfenix tribright led technology gives you the industry's brightest led strips. Tribright uses independent ics to power each led bulb for maximum brightness.

Precision manufactured

Alchemy led strips are made using a precision smt manufacturing process, which means the highest quality, enhanced current conduction, and prolonged life.

Chainable connect series

Have a special idea that needs an extra-long length of led strips? No problem. With alchemy connect led strips, you can connect as many strips together as you need with the only limitation being your power supply's current.

Waterproof aqua series

Want to pimp out your water-cooled rig? Use alchemy aqua series led strips, which are completely waterproof and perfect for liquid cooling reservoirs.

High grade adhesive

Bitfenix alchemy led strips are backed with high-grade adhesive from 3m, which makes sure that your led strips will remain where you left them, even when your computer is being moved around.

ComX Computers

Product Specification Sheet

Multiple colors and lengths

No two modding projects are alike, which is why alchemy led strips come in a large variety of colors and lengths.

Specifications:

© 2014 Respective owners and brand holders. This table has been carefully researched and generated by ComXpert International CC (<http://www.comx.co.za>), however, errors and omissions may occur. Only references to South Africa apply. All products are sourced in South Africa from the official suppliers and the warranty is that of the local supplier. E&OE. This table and our site's content may be used on condition that this notice and link remains intact and unaltered.

Specifications

Product Code	LT-BG9/30WP
--------------	-------------

Specs

Available LED Colors	Green
LED Type	5050 Top SMD
Angle	120 degrees
Lumens	50-60lm
Voltage (v)	12

Alchemy Connect 120mm

LEDs	6
Wattage (W)	1.44

Alchemy Connect 30cm

LEDs	15
Wattage (W)	3.6

Alchemy Connect 60cm

LEDs	30
Wattage (W)	7.2

Alchemy Aqua 20cm

LEDs	6
Wattage (W)	1.44

Alchemy Aqua 30cm

LEDs	9
Wattage (W)	2.16

Alchemy Aqua 50cm

LEDs	15
Wattage (W)	3.6

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page:

<https://www.comx-computers.co.za/LT-BG9-30WP-Bitfenix-BFA-AAL-30GK9-RP-alchemy-aqua-Buy-p-87604.php>

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: <https://www.comx-computers.co.za/terms-of-use.php>

Terms of Sale: <https://www.comx-computers.co.za/terms-of-sale.php>

PDF generated: 2026-10-11 08:19:50.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.